


WeatherBond TPO

Heat Weldable Walkway Rolls

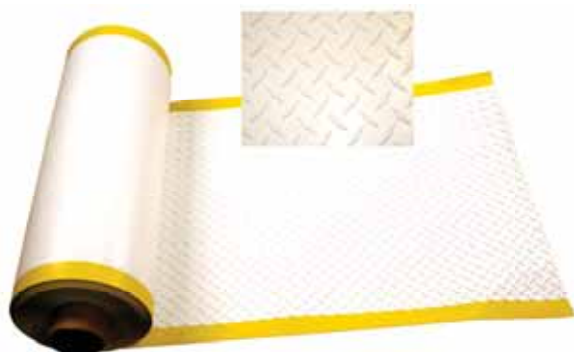

Overview

WeatherBond's TPO Heat Weldable Walkway Roll is designed to protect the WeatherBond membrane in those areas exposed to repetitive foot traffic and other hazards. Walkways must be installed at all traffic concentration points (i.e., roof hatches, access doors, rooftop ladders, etc.) regardless of traffic frequency. Walkways must also be installed if regular maintenance (once a month or more) is necessary to service rooftop equipment.

WeatherBond's TPO Walkway Rolls are part of the Certified Fabricated Accessory (CFA) program. Certified Fabricated Accessories are the only factory-fabricated TPO accessories that meet the stringent quality tolerances required to be included in a WeatherBond roofing system.

Features and Benefits

- Increased slip resistance created with a diamond-plate tread pattern
- Walkway edges are trimmed in safety yellow to better define the designated traffic flow
- The yellow edges are smooth without tread lugs for easier welding
- Superior weathering package for long-term performance
- Stocked in white, tan and gray, special colors available (minimum quantities apply)

Installation

1. Use Weathered Membrane Cleaner to prepare the membrane area that will be welded to the walkway material.
2. Position the walkway material. Cut the Walkway Rolls into maximum 10' lengths and position with a minimum 1" gap between adjacent pieces to allow for water drainage. Cut the walkway so a 4" minimum gap is created over any field splices. (As the attachment of the walkway to the membrane is permanent, this will allow access to the field seams.)
3. Using an automated welder, **weld all four sides of the walkway material to the membrane.** (Typically the same speed and temperature settings will be used for this procedure as for welding membrane to membrane. A test weld is always recommended prior to performing welds to the installed membrane.) A hand-held welder may be utilized; however, productivity will be decreased.

REVIEW CURRENT WEATHERBOND INSTALLATION INSTRUCTIONS FOR SPECIFIC INSTALLATION REQUIREMENTS.

Precautions

1. This product is to be used as a walkway only and is not designed as a perimeter warning line or a substitute for ballast. Walkway rolls cannot be installed within 10' (3 m) of the roof perimeter.
2. Allow the walkway to relax and warm up in the sun prior to welding in place.
3. When possible, weld the Walkway Rolls when the ambient temperature is above 60°F (16°C) to help prevent wrinkles.

Typical Properties and Characteristics

Physical Property	Test Method	Typical Properties	
		Minimum	Maximum
Dimensional Conformance Thickness, in. (mm)	ASTM D412	0.160 (4.06)	0.180 (4.5)
Density, lbs./ft ³ ; (gr/cm ³);	ASTM D792	80.5 (1.29)	84.3 (1.35)
Tensile Strength, psi (MPa)	ASTM D638	600 (4.1)	
Tear Strength, lbf/in (kN/m)	ASTM D624	100 (17.5)	
Sizes	34" wide x 50' long		
Packaging	9 per skid, each roll individually bagged		
Weight (each)	97 lbs.		
Thickness	80-mil at bottom of tread, 80-mil at yellow welding edge, 170-mil overall		
Color	White, gray, and tan		

Typical properties and characteristics are based on samples tested and are not guaranteed for all samples of this product. This data and information is intended as a guide and does not reflect the specification range for any particular property of this product.



WEATHERBOND
ROOFING SYSTEMS

Single-Ply Simplified